
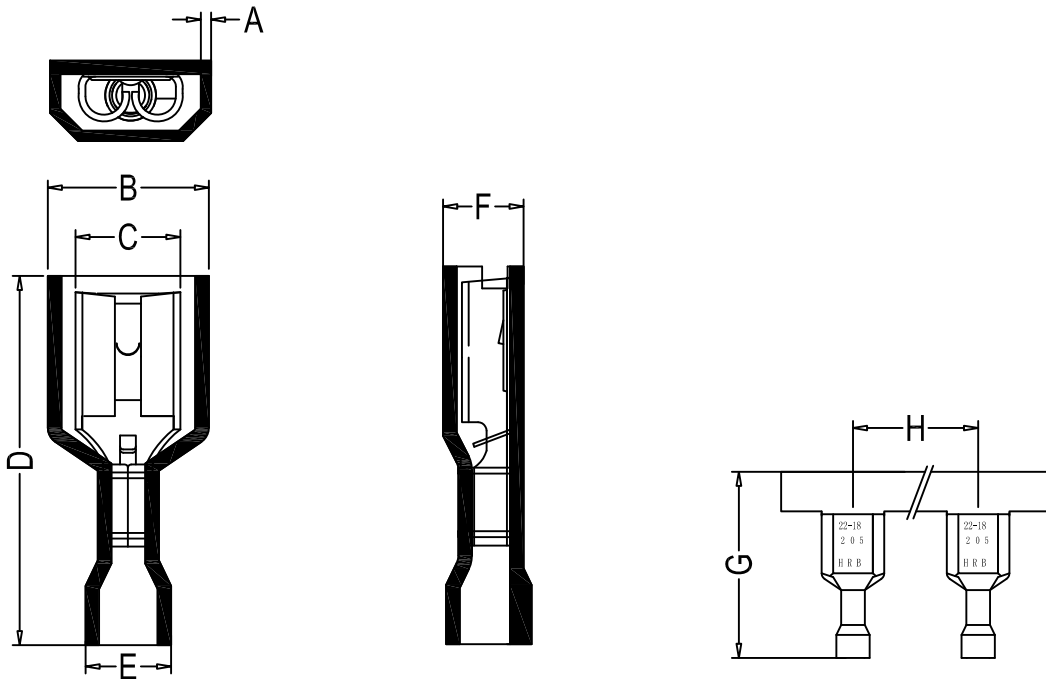
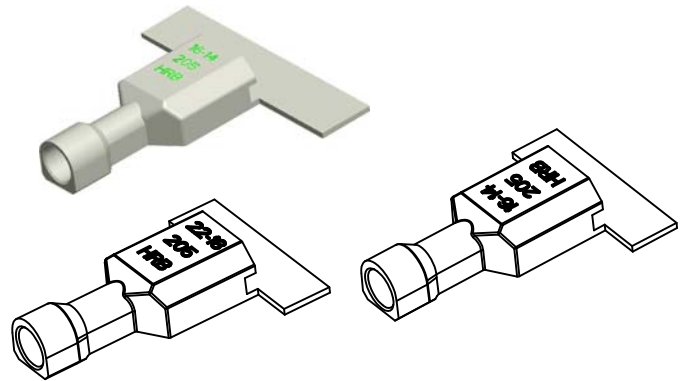


.205" Series Nylon-insulated Female Terminal

SPECIFICATIONS:

- Current Rating: AWG#22~#18:10A AC,DC
AWG#16~#14:15A AC,DC
- Voltage Rating:300V AC,DC
- Operating Temperature:-25℃~+105℃
- Material:Housing:Nylon66 UL 94V-2
Terminal:Brass.Tin-plated
- Tab Size:5.21x0.80mm Or 5.21x0.50mm
- The Insertion Force And Male Terminal:7.8kg (max.)
- The withdrawal Force And Male Terminal:3.0kg (Min.)
- Crimp tensile strength:AWG#22~#18:5.0kg (Min.)
AWG#16~#14:10.0kg (Min.)
-  us File No:E322751



Ordering Information And Dimensions

| 205# | Part NO. | A | B | C | D | E | F | G | H | Wire Size | Ins.Dia.max |
|-------------------|-------------------|------|------|-------|-------|------|-------|-------|------------|------------|-------------|
| | M6350FN(S)-2(5)-R | 0.75 | 9.75 | 6.50 | 21.80 | 5.30 | 5.00 | 28.20 | 18.85 | AWG#22~#18 | 3.05mm |
| M6350FN(S)-2(5)-b | 0.75 | 9.75 | 6.50 | 21.80 | 6.10 | 5.00 | 28.20 | 18.85 | AWG#16~#14 | 4.06mm | |
| M6350FN(S)-2(8)-R | 0.75 | 9.75 | 6.50 | 21.80 | 5.30 | 5.00 | 28.20 | 18.85 | AWG#22~#18 | 3.05mm | |
| M6350FN(S)-2(8)-b | 0.75 | 9.75 | 6.50 | 21.80 | 6.10 | 5.00 | 28.20 | 18.85 | AWG#16~#14 | 4.06mm | |